

FEATURES & SPECIFICATIONS

INTENDED USE — Outdoor storage areas, warehouse and factory perimeters and loading docks.

CONSTRUCTION — Rugged, corrosion-resistant, die-cast aluminum. Corrosion-resistant external hardware includes slotted hex-head fasteners.

Finish: Standard finish is electrostatically-applied, oven-cured, dark bronze (DDB) corrosion-resistant polyester powder paint.

OPTICS — Reflector is specular anodized aluminum. Refractor is prismatic borosilicate glass which is sealed and gasketed to inhibit the entrance of outside contaminants.

ELECTRICAL — Ballast: Class P, multi-volt, electronic, high power factor, <10%THD, with starting temperature of 0°F (-18°C). Fluorescent socket is high temperature thermoplastic with an integral lamp retention clip.

INSTALLATION — Back housing is separated from front housing, eliminating ballast weight and promoting easy handling. Top 3/4" threaded wiring access. Back access through removable 3/4" knockout. Feed-thru wiring can be achieved by using a conduit tee. Mount on any vertical surface. **Not recommended in applications where a sprayed stream of water can come in direct contact with glass lens.**

LISTINGS — UL Listed (standard). UL Listed to Canadian Safety Standards. NOM Certified (see Options). UL listed for 25° ambient and suitable for wet locations. IP65 rated.

Actual performance may differ as a result of end-user environment and application.

Note: Specifications subject to change without notice.

Catalog Number
Notes
Type



Wall Packs

TWH

COMPACT FLUORESCENT: 26DTT - 2/42TRT
8' to 25' Mounting

Specifications

Height: 15-3/4 (40.0)


Width: 16-1/4 (41.3)

Depth: 8 (20.3)

*Weight: 24 lbs. (10.89 kg)

All dimensions are inches (centimeters) unless otherwise indicated.

*Weight as configured in example below.

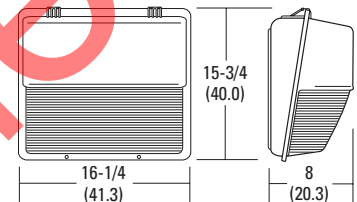

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your local sales representative.

Example: TWH 2/42TRT MVOLT LPI

TWH						
Series	Wattage	Voltage	Ballast	Options	Finish ⁶	Lamp ⁸
TWH	2/26DTT 2/26TRT 2/32TRT 2/42TRT	120 277 MVOLT ¹	(blank) Electronic 0° F	<u>Shipped installed in fixture</u> BDP Ballast disconnect EC Emergency circuit ² GLR Internal fast-blow fusing ³ GMF Internal slow-blow fusing ³ PE Photoelectric cell – button type ³ FS Full shield TP Tamper proof screws CSA CSA Certified NOM NOM Certified ⁴ <u>Shipped separately⁵</u> VG Vandal guard WG Wire guard	(blank) Dark bronze DNA Natural aluminum DBL Black DMB Medium bronze DGC Charcoal gray DWH White CR Enhanced corrosion-resistant finish CRT Non-stick protective coating ⁷	LPI Lamp included L/LP Less lamp

Notes

- Multi-volt electronic ballast capable of operating on any line voltage from 120-277V.
- Max allowable wattage lamp included.
- Must specify voltage. Not available with MVOLT.
- Consult factory for available wattages.
- May be ordered as an accessory. Prefix with TWH. Requires field modification.
- See www.lithonia.com/archcolors for additional color options.
- Black finish only.
- Must be specified. (35K lamp with LPI)

Discontinued