



Catalog Number
Notes
Type

Contractor Select™

LFRM

Lithonia Frame™

The Lithonia® FRAME by Lithonia Lighting® offers a modern, upscale aesthetic with functionality and performance to match. At the heart of the FRAME design is the 'snap' together assembly which provides unrivaled value in shipping, storage and installation costs. Featuring Switchable color temperature and adjustable lumen technology, the FRAME allows you to fine tune the look and feel of your space. The FRAME is designed with the latest optical technology to provide the same efficiency and output as a traditional LED flat Panel, for a fraction of the weight and cost.

FEATURES:

- Switchable Color Temperature – 3500K, 4000K, 5000K
- Adjustable Lumen Output – Low, Mid, High (Up to 6000LM)
- High efficacy - >125LPW
- 80CRI
- DLC Premium
- 5% Uplight
- 'Snap' Connect for quick assembly



Catalog Number	UPC	Description	Lumens	Input Watts	CCT	CRI	Voltage
LFRM 2X2 AL03 SWW7 MVOLT M6	197589570403	2X2 LED FRAME	See Performance Table	See Performance Table	3500K/4000K/5000K	80	120-277V
LFRM 2X4 AL08 SWW7 MVOLT M6	197589570410	2X4 LED FRAME	See Performance Table	See Performance Table	3500K/4000K/5000K	80	120-277V
LFRM 2X2 AL03 SWW7 UVOLT M6	197590617197	2X2 LED FRAME	See Performance Table	See Performance Table	3500K/4000K/5000K	80	120-347V
LFRM 2X4 AL08 SWW7 UVOLT M6	197590617210	2X4 LED FRAME	See Performance Table	See Performance Table	3500K/4000K/5000K	80	120-347V

Accessories: Order as separate catalog number.

ILD 10	LED Emergency Battery Pack, 10W 55VDC, UL Listed for field installation & CA T20 Compliant
ILB CP10 A	LED Emergency Battery Pack, 10W 50VDC (Noncompliant with CA T20)



Switchable Table						
Size(ft)	Nomenclature	Lumen Package	CCT	Lumen	Wattage	Efficacy
2x2	LFRM 2x2 AL03 SWW7 MVOLT M7	Low Lumens	3500K	3130	23.5	133.2
			4000K	3230	23.0	140.4
			5000K	3270	23.3	140.3
		Medium Lumens	3500K	4070	31.2	130.4
			4000K	4200	30.6	137.3
			5000K	4270	31.2	136.9
		High Lumens	3500K	5000	39.4	126.9
			4000K	5170	38.4	134.6
			5000K	5220	39.0	133.8
2x4	LFRM 2x4 AL08 SWW7 MVOLT M8	Low Lumens	3500K	4190	30.6	136.9
			4000K	4260	30.2	141.1
			5000K	4330	30.5	142.0
		Medium Lumens	3500K	5140	38.5	133.5
			4000K	5240	37.9	138.3
			5000K	5340	38.3	139.4
		High Lumens	3500K	6130	47.0	130.4
			4000K	6330	46.6	135.8
			5000K	6400	47.0	136.2
2x2	LFRM 2x2 AL03 SWW7 UVOLT M6	Low Lumens	3500K	3260	24.6	132.5
			4000K	3290	23.7	138.8
			5000K	3320	24.0	138.3
		Medium Lumens	3500K	4260	32.0	133.1
			4000K	4360	31.5	138.4
			5000K	4320	32.0	135.0
		High Lumens	3500K	5124	38.3	133.7
			4000K	5233	37.8	138.4
			5000K	5163	38.0	135.8
2x4	LFRM 2x4 AL08 SWW7 UVOLT M6	Low Lumens	3500K	4310	31.6	136.4
			4000K	4170	30.9	135.0
			5000K	4413	31.0	142.4
		Medium Lumens	3500K	5400	39.8	135.7
			4000K	5495	39.2	140.2
			5000K	5500	39.5	139.2
		High Lumens	3500K	6137	46.6	131.7
			4000K	6253	45.8	136.5
			5000K	6202	46.0	134.8



Specifications

INTENDED USE:

Available in 1x4, 2x2 and 2x4 configurations, the LITHONIA® FRAME offers a modern, upscale aesthetic with functionality and performance to match. The Frame features selectable lumen output and switchable color temperature to allow you to fine tune the look and feel of your space. Featuring the latest optical technology, the Frame is designed to provide the same lighting specifications as a traditional LED flat Panel.

CONSTRUCTION

At the heart of the FRAME design is the 'snap' together assembly which provides unrivaled value in terms of shipping, storage and installation. The extruded aluminum frame features an outer shield to limit glare while providing uplight to add an asthetically pleasing glow to the ceiling tile above. The remote mount driver features integral T-bar clips to easily mount into the ceiling and allow for easy access for maintenance.

ELECTRICAL

Long-life LED's, coupled with high-efficiency drivers provide superior quality of light and an extended service life. 80% LED lumen maintenance at 60,000 hours (L80/60,000). 0-10 volt dimming driver, dims to 10%.

INSTALLATION

With an installed depth of only 2.1" and very lightweight design, the FRAME makes for an easy installation, especially in restricted plenum applications. The FRAME fits into standard 15/16" and narrow 9/16" T-grid ceiling systems. Suitable for damp location.

LISTINGS

CSA certified to meet US and Canadian standards. Damp location listed. IC rated. DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.



WARRANTY:

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Dimensions

2'x2'

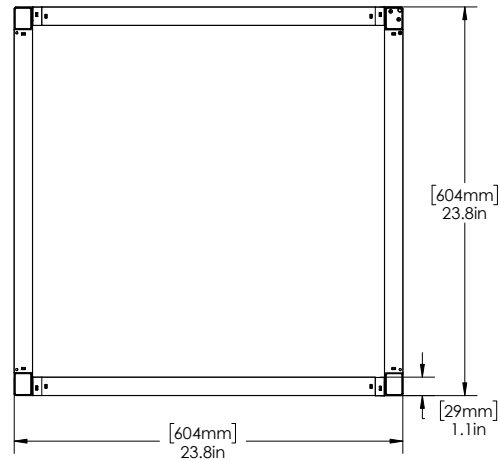

2'x4'

