gotham® | E V O®

Multiple Layers of Light

Luminaire Type:


Catalog Number:

General Illumination Round Downlight

6"



250 - 8,000 lumens

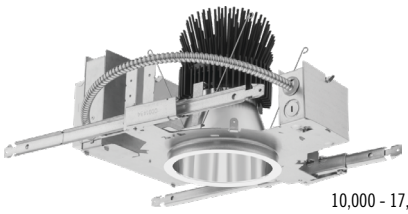

10,000 - 17,500 lumens

OVERVIEW

Feature Set

- Bounding Ray™ optical design
- Unitized optics mechanically attach the light engine to the lower reflector for complete optical alignment.
- 45° cutoff to source and source image
- Fully serviceable and upgradeable lensed LED light engine
- 70% lumen maintenance at 60,000 hours
- 2.5 MacAdam Ellipse; 85 CRI typical, 90+ CRI optional
- Fixtures are wet location, covered ceiling
- Available with 10% dimming, 1% dimming, or dim to dark
- Batwing distribution with feathered edges provides even illumination on horizontal and vertical surfaces
- UGR of zero for fixtures aimed at nadir with a cut-off equal to or less than 60deg per CIE 117-1995 Discomfort Glare in Interior Lighting. UGR FAQ

Distribution

Very Narrow (VND) 0.5 S:MH | Narrow (ND) 0.7 S:MH | Medium (MD) 0.8 S:MH | Medium Wide (MWD) 1.0 S:MH | Wide (WD) 1.2 S:MH

design select

Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit www.acuitybrands.com/designselect.

*See ordering tree for details

Superior Performance

Nominal Lumens	250	500	750	1000	1500	2000	2500	3000	3500	4000	4500	5000	6000	8000	10,000	12,000	15,000	17,500
Delivered Lumens	297	519	776	994	1471	2006	2537	3077	3542	4027	4533	5256	6371	8247	10637	12332	15776	17801
Wattage	3.4	6.2	8.2	9.6	14.7	19.7	24.7	29.5	33.8	39.0	47.3	48.7	57.6	74.9	97.1	115.0	150.9	175.3
Lumens per Watt	87.4	83.7	94.6	103.5	100.1	101.8	102.7	104.3	104.8	103.3	95.8	107.9	110.6	110.1	109.5	107.2	104.5	101.5

*Based on 3500K AR LSS MWD 80CRI

COMPLIMENTARY PRODUCTS

Coordinated Apertures | Multiple Layers of Light



General Illumination Layer | EVO



High Center Beam Layer | Incito



EVO + Incito — Multiple Layers of Light

Core



Downlight | Adjustable | Open Wallwash | Lensed Wallwash | Cylinder | Pinhole | Bevel | Hyperbolic

Healthcare



MRI | Surgical Suite | Patient Room

Special Applications



Dynamic | Food Service | Vandal/Tamper | Clean Room | Shower | Steam Room

GOTHAM ARCHITECTURAL DOWNLIGHTING | 1 Acuity Way, Decatur, GA 30035 | P 800-705-SERV (7378) | gothamlighting.com

© 2014-2025 Acuity Brands Lighting Inc. All Rights Reserved. Rev. 09/03/25 Specifications subject to change without notice.

ORDERING INFORMATION

Design Select options indicated by this color background.

Luminaire Type:

Catalog Number:

EXAMPLE: EV06 35/150 AR MWD LSS MVOLT EZ1

Series	Color Temperature	Nominal Lumen Values	Reflector & Flange Color	Trim Style	Finish
EV06	27/ 2700 K 30/ 3000 K 35/ 3500 K 40/ 4000 K 50/ 5000 K	02 250 lumens 05 500 lumens 07 750 lumens 10 1000 lumens 15 1500 lumens 20 2000 lumens 25 2500 lumens 30 3000 lumens 35 3500 lumens 40 4000 lumens 45 4500 lumens 50 5000 lumens 60 6000 lumens 80 8000 lumens 100 10000 lumens 120 12000 lumens 150 15000 lumens 175 17500 lumens	AR Clear PR Pewter WTR Wheat GR Gold WR[1] White BR[1] Black WRAMF[1] White Anti-microbial TRALTBD[1,2] RAL paint for pricing only TCPC[1] Custom paint color	(blank) Self-flanged FL Flangeless	LSS Semi-specular LD Matte-diffuse LS Specular

Distribution	Voltage	Driver[5]	
VND Very Narrow (0.5 s/mh) ND Narrow (0.7 s/mh) MD Medium (0.9 s/mh) MWD Medium Wide (1.0 s/mh) WD Wide (1.2 s/mh)	MVOLT 120 277 347[3,4]	GZ10 0-10V driver dims to 10% GZ1 0-10V driver dims to 1% EZ10 eldoLED 0-10V ECOdrive. Linear dimming to 10% min. EZ1 eldoLED 0-10V ECOdrive. Linear dimming to 1% min. EZB eldoLED 0-10V SOLOdrive. Logarithmic dimming to <1%. EDAB eldoLED SOLOdrive DALI. Logarithmic dimming to <1%.	EDXB eldoLED POWERdrive DMX with RDM (remote device management). Square Law dimming to <1%. Includes termination resistor. Refer to DMXR Manual. Minimum 1000 lumens/Maximum 15000 lumens. ECOD[6] Lutron Ecosystem digital Hi-Lume 1% soft-on, fade to black. Max: 4000LM.

Control Interface	Emergency Options	Options
NLT[7] nLight® dimming pack controls NLTER[3,7,8] nLight® dimming pack controls emergency circuit NLTAIR2[9,10] nLight® AIR enabled NLTAIRER2[3,8,10] nLight® AIR enabled emergency NLTAIREM2[3,9] nLight® AIR Dimming Pack Wireless Controls. Controls fixtures on emergency circuit with battery pack options.	ELSD Emergency battery pack, 10W, with self-diagnostics, integral test switch ELRSD Emergency battery pack, 10W, with self-diagnostics, remote test switch E10W Emergency battery pack, 10W Constant Power, CA Title 20 compliant with integral test switch E10WR Emergency battery pack, 10W Constant Power, CA Title 20 compliant with remote test switch GTD Generator transfer device. Specify 120V or 277V.	SF Single fuse. Specify 120V or 277V. TRW[11] White painted flange TRBL[12] Black painted flange FRALTBD[2] Flange ring only RAL color for pricing only FCPC Flange custom paint color N80[13] nLight® Lumen Compensation 90CRI High CRI (90+) CP[14] Chicago Plenum. Specify 120V or 277V for 5000lm and above. HAO[15] HAO High Ambient Option (40°C) RRL_ RELOC®-ready luminaire connectors enable a simple and consistent factory installed option across all ABL luminaire brands. Available only with RRLA, RRLB, RRLAE, and RRLC12S. Refer to RRL spec sheet on www.acuitybrands.com for RELOC® product specifications. Above ceiling access required.

ACCESSORIES – order as separate catalog numbers (shipped separately)

SCA6	Sloped ceiling adapter. Degree of slope must be specified (5D, 10D, 15D, 20D, 25D, 30D). Ex: SCA6 10D. Refer to TECH-190.
CTA EV06	6" Aperture ceiling thickness adapter, for up to 8,000LM (extends mounting frame to accommodate ceiling thickness up to 5").
CTA4-8 YK	4"-8" Aperture ceiling thickness adapter for use with EDXB or CP up to 8,000LM, or nTune options (extends mounting frame to accommodate ceiling thickness up to 5").
CTA4-8 YKHL	6" Aperture ceiling thickness adapter, for 10,000LM and up (extends mounting frame to accommodate ceiling thickness up to 5"). For use with CWW/DWW trims, EDXB, CP or nTune options.
ISD BC	0-10V wallbox dimmer. Refer to ISD-BC.

ORDERING NOTES

1. Not available with finishes.
2. Replace with applicable RAL number and finish when ready to order. See RAL BROCHURE for available color options. Not available with emergency battery pack options.
3. Not available with emergency battery pack options.
4. Supplied with factory installed step down transformer. Max 5000LM.
5. Refer to TECH-240 for compatible dimmers.
6. Not available with nLight®.
7. Specify voltage.
8. ER for use with generator supply power. Will require an emergency hot feed and normal hot feed.
9. Not available DALI or DMX drivers. Not available with CP or N80 options. Not recommended for metal ceiling installations.
10. When combined with the EZ1, EZ10, or EZB option, normal luminaires (non-emergency) can be used as a normal power sensing device for nearby nLight AIR devices and luminaires with EM emergency options.
11. For use with different reflector finish only (i.e. AR, PR, WTR, GR options). Not applicable with WR (white reflector) or FL (flangeless) option.
12. For use with different reflector finish only (i.e. AR, PR, WTR, GR options). Not applicable with BR (black reflector) or FL (flangeless) option.
13. Fixture begins at 80% light level. Must be specified with NLT or NLTER. Only available with EZ10 and EZ1 drivers.
14. 12,000LM max with EL or nLight® options. 5,000LM max with Lutron drivers combined with EL. Not available with ELR, HAO, or EXAB, or any nLight® AIR dimming options.
15. Only available 5000LM - 15,000LM with eldoLED drivers.

© 2014-2025 Acuity Brands Lighting Inc. All Rights Reserved.

SPECIFICATIONS

Optical Assembly
Optical design is a Bounding Ray™ design with 45° cutoff to source and source image. Top-down flash characteristic for superior glare control.
Unitized optics shall have mechanical attachment of the light engine to the lower reflector for complete optical alignment.

Electrical
The luminaire shall operate from a 50 or 60 Hz ±3 Hz AC line over a voltage ranging from 120 VAC to 277 VAC. The fluctuations of line voltage shall have no visible effect on the luminous output.
The luminaire shall have a power factor of 90% or greater at all standard operating voltages and full luminaire output.
Sound Rated A+. Driver shall be >80% efficient at full load across all input voltages.
Input wires shall be 18AWG, 300V minimum, solid copper.

Controls
Luminaire shall be equipped with interface for nLight wired or wireless network with integral power supply as per specification.

Dimming
The luminaire shall be capable of continuous dimming without perceivable stroboscopic flicker as measured by flicker index (ANSI/IES RP-16-10) over a range of 100 – 10%, 100 – 1.0% or 100 – 0.1% of rated lumen output with a smooth shut off function to step to 0%.
eldoLED LED drivers shall conform to IEEE P1789 standards. Alternatively, manufacturers must demonstrate conformance with product literature and testing which demonstrates this performance. Systems that do not meet IEEE P1789 will not be considered.
Driver is inaudible in 24dB environment, and stable when input voltage conditions fluctuate over what is typically experienced in a commercial environment.

Construction
Fully serviceable and upgradeable lensed LED light engine, both the driver and light engine are suitable for field maintenance and are serviceable from above or below the ceiling.
Luminaire housing shall be constructed of 16-gauge galvanized steel and have preinstalled telescopic mounting bars with maximum 32" and minimum 15" extension and 4" vertical adjustment.
Luminaires shall be suitable for installation in ceilings up to 1½" thick. (specify ceiling thickness adapter to extend frame to accommodate ceiling thickness up to 5").
Tool-less adjustments shall be possible after installation.
The assembly and manufacturing process for the luminaire shall be designed to assure all internal components are adequately supported to withstand mechanical shock and vibration.
25°C ambient temperature standard (1/2" clearance on all sides from non-combustible materials in non-IC applications, unless marked spacing noted otherwise). For use in insulated ceilings, a 3" clearance on all sides from insulation is required (unless marked spacing noted otherwise). 40°C high ambient optional.

Listings
Fixtures are CSA certified to meet US and Canadian Standards: All fixtures manufactured in strict accordance with the appropriate and current requirements of the "Standards for Safety" to UL, wet location covered ceiling.

Government Procurement
BAA - Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations
BABA - Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act
Please refer to www.acuitybrands.com/buy-american for additional information.

Photometrics
LEDs tested to LM-80 standards. Measured by IESNA Standard LM-79-08 in an accredited lab. Lumen output shall not decrease by more than 30% over the minimum operational life of 60,000 hours.
Color appearance from luminaire to luminaire of the same type and in all configurations, shall be consistent both initially and at 60,000 hours and operate within a tolerance of <2.5 MacAdam ellipse as defined by a point at the intersection of the CCT line and the black body locus line in CIE chromaticity space.

Warranty
5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note:
Actual performance may differ as a result of end user environment and application.
All values are design or typical values, measured under laboratory conditions at 25 °C.

A+ Capable Luminaire
This item is an A+ capable luminaire, which has been designed and tested to provided consistent color appearance and out-of-the-box control capability with simple commissioning when used with Acuity Brands controls products.
All configurations of this luminaire are calibrated and tested meet the Acuity Brands' specification for chromatic consistency - including color rendering, color fidelity and color temperature tolerance around standard CIE chromaticity coordinates.
To learn more about A+, visit www.acuitybrands.com/aplus.

© 2014-2025 Acuity Brands Lighting Inc. All Rights Reserved. Rev. 09/03/25 Specifications subject to change without notice.

Tables of Use

Marked Spacing in Inches 25°C Ambient			
Lumen Package	Fixed Center to Center MIN	Fixture Center to Building Member MIN	Space Above Fixture
500-5000	None	None	None
6000	24	12	5
8000	36	18	11
10000			9
12000			
15000			
17500	72	36	

EVO - eldoLED Driver Default Dimming Curve			
Nomenclature	Min Dimming	Driver Dim Curve	Control Dim Curve
EZ10	10%	Linear	Linear/Logarithmic
EZ1	1%	Linear	Linear/Logarithmic
EXA1	1%	Linear	Linear/Logarithmic
EZB	<1%	Logarithmic	Linear
EDAB	<1%	Logarithmic	Linear
EXAB	<1%	Logarithmic	Linear
EDXB	<1%	Square	Linear

Marked Spacing in Inches 40°C Ambient			
Lumen Package	Fixed Center to Center MIN	Fixture Center to Building Member MIN	Space Above Fixture
5000	24	12	5
6000			
8000	48	24	9
10000			
12000			
15000	72	36	9

Marked Spacing Chicago Plenum Open Frame in Inches 25°C Ambient			
Lumen Package	Fixed Center to Center MIN	Fixture Center to Building Member MIN	Space Above Fixture
250-5000	None	None	None
6000	24	12	5
8000	36	18	11
10000			9
12000			
15000			
17500	72	36	

Marked Spacing Chicago Plenum Enclosure in Inches 25°C Ambient			
Lumen Package	Fixed Center to Center MIN	Fixture Center to Building Member MIN	Space Above Fixture
250-6000	None	None	None
8000	36	18	6
10000	48	24	3
12000			

Driver		Control Provided (note: 347V/UVOLT versions provided with 347 option selected)			
Nomenclature	Description	NLT	NLTER	NLTAIR2	NLTAIRER2
GZ10	0-10V driver dims to 10%	nPP16 D EFP	nPP16 D ER EFP	RPP20 D 24V G2	RPP20 D 24V ER G2
GZ1	0-10V driver dims to 1%	nPP16 D EFP	nPP16 D ER EFP	RPP20 D 24V G2	RPP20 D 24V ER G2
EZ10	eldoLED 0-10V ECOdrive	nPS 80 EZ	nPS 80 EZ ER	RPP20 D 24V G2	RPP20 D 24V ER G2
EZ1	eldoLED 0-10V ECOdrive	nPS 80 EZ	nPS 80 EZ ER	RPP20 D 24V G2	RPP20 D 24V ER G2
EZB	eldoLED 0-10V SOLOdrive	nPS 80 EZ	nPS 80 EZ ER	RPP20 D 24V G2	RPP20 D 24V ER G2

How to Estimate Delivered Lumens in Emergency Mode

Delivered Lumens = 1.25 x P x LPW

P = Output power of emergency driver. P = 10W for PS1055CP

LPW = Lumen per watt rating of the luminaire. This information is available on the ABL luminaire spec sheet.

Flangeless


Flangeless Installation

Gotham's flangeless option utilizes a micro-thin polymer mud ring that minimizes the amount of drywall compound required to finish the ceiling. The end result is a virtually undetectable flangeless downlight installation.

The polymer mud ring is installed independent of the of the recessed frame, therefore floating with the ceiling. This innovation minimizes any surface cracks during reflector installation, ceiling movement and any future service to the recessed frame, wiring, electronics, etc.



Partially finished mud ring, showing cross-section detail.

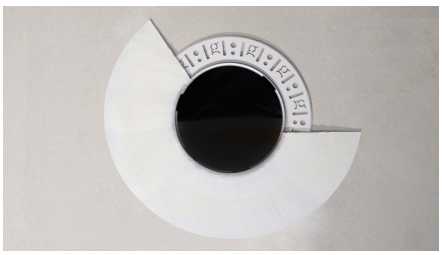

An EVO downlight requires only approximately 3" of plaster to finish.



EVO with flangeless trim


© 2014-2025 Acuity Brands Lighting Inc. All Rights Reserved. Rev. 09/03/25 Specifications subject to change without notice.

DIMENSIONAL DATA


*Dimensions in inches [centimeters]

Aperture: 6 1/4" [15.9)]	Ceiling Opening: 7 1/8" [18.1] self-flanged
Overlap Trim: 7 1/2" [19.1]	7 1/4" [18.4] flangeless


250LM-5000LM Standard

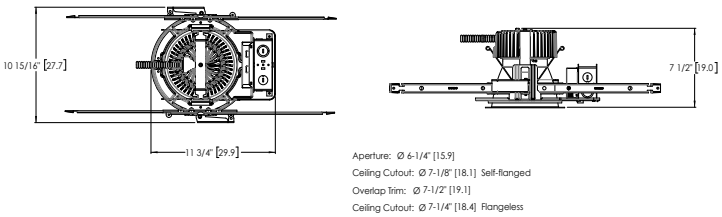


250LM-5000LM Battery Pack

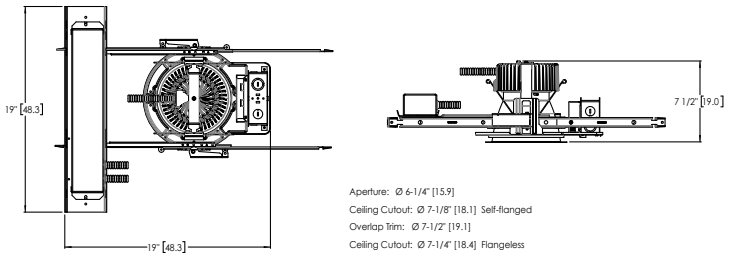


6000LM-8000LM Standard

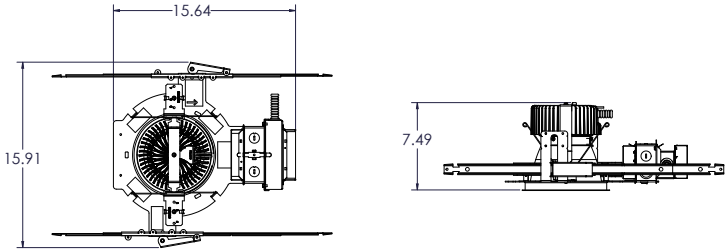


6000LM-8000LM Battery Pack

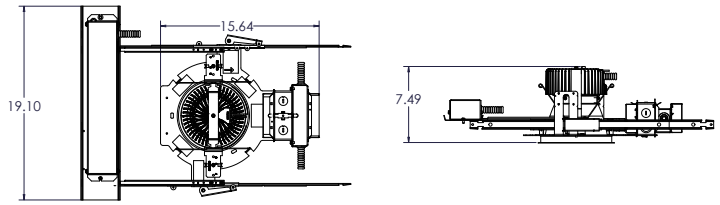

10,000LM-17,500LM Standard

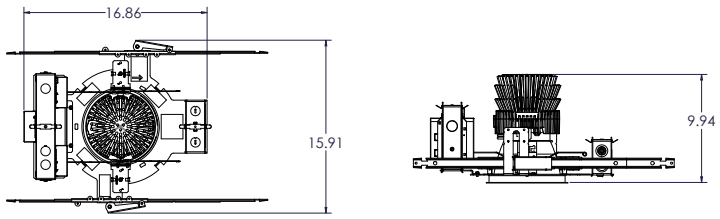

10,000LM-17,500LM Battery Pack

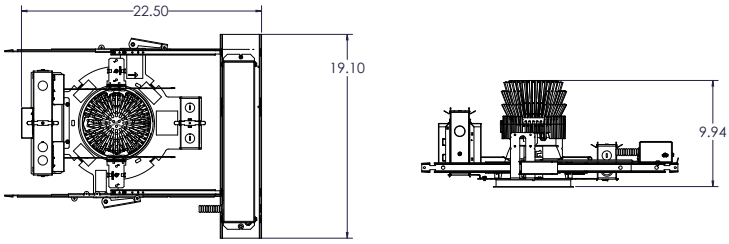


GOTHAM ARCHITECTURAL DOWNLIGHTING | 1 Acuity Way, Decatur, GA 30035 | P 800-705-SERV (7378) | gothamlighting.com
© 2014-2025 Acuity Brands Lighting Inc. All Rights Reserved. Rev. 09/03/25 Specifications subject to change without notice.

gotham®


DIMENSIONAL DATA

*Dimensions in inches [centimeters]


250LM-4500LM CP

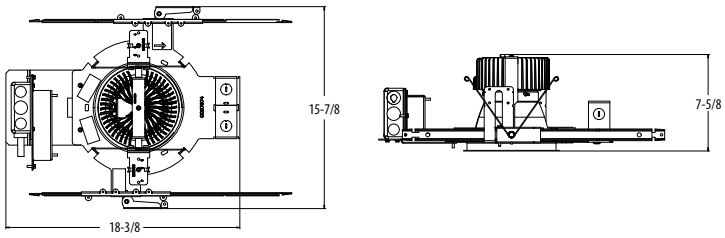


10000LM - 17,500LM Lumen Open Frame CP

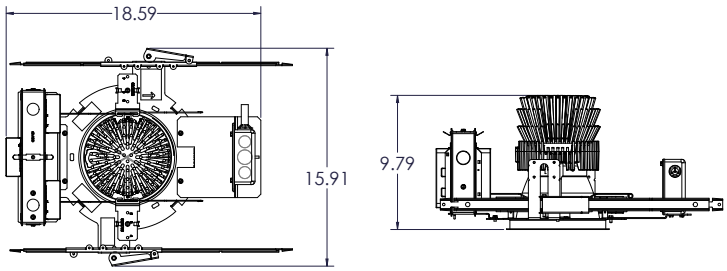


5000LM ECO/SOLO Drive Open Frame CP

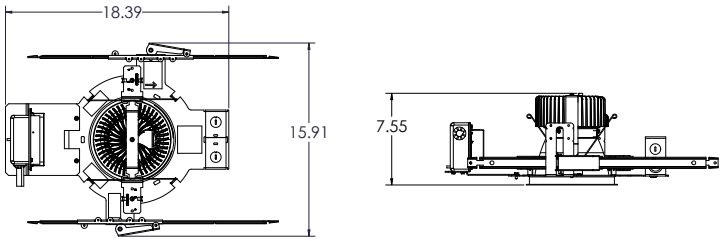


5000LM (Lutron & POWER Drive Only), 6000LM & 8000LM Open Frame CP

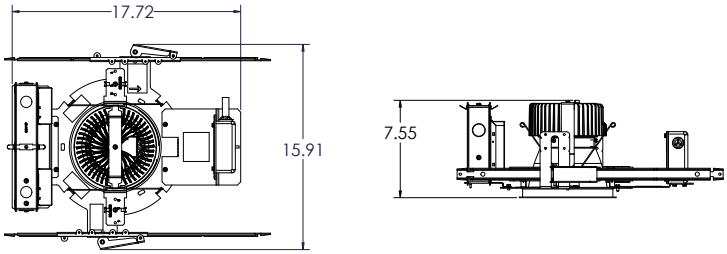


250LM - 6000LM CP Enclosed with Battery Pack and/or nLight™ Only

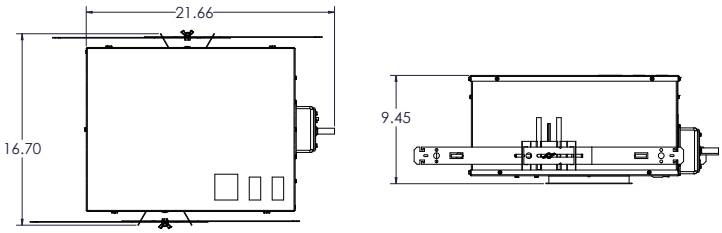

8,000LM CP Enclosed with Battery Pack and/or nLight™ Only

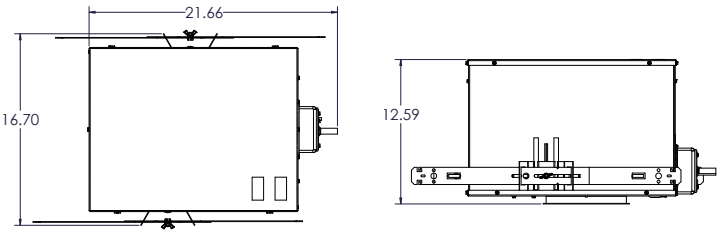


10,000LM-12,000LM CP Enclosed with Battery Pack and/or nLight™ Only

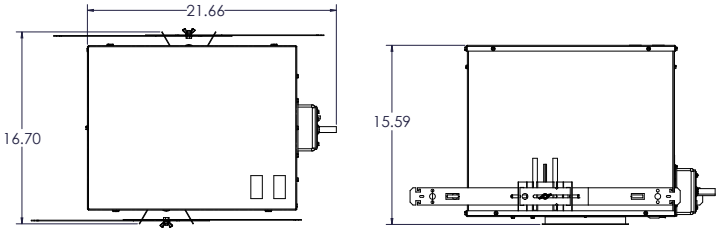

© 2014-2025 Acuity Brands Lighting Inc. All Rights Reserved. Rev. 09/03/25 Specifications subject to change without notice.

Photometry

EV06 35/15 AR MWD LS INPUT WATTS: 14.7, DELIVERED LUMENS: 1471LM, LPW= 100, 1.03 S/MH, TEST NO. LTL27783P1505




	Ave	Lumens
0	1431	
5	1410	134
15	1442	405
25	1161	523
35	540	332
45	78	72
55	3	4
65	1	1
75	0	1
85	0	0
90	0	

Zone	Lumens	% Lamp
0° - 30°	1061.4	72.2
0° - 40°	1393.5	94.7
0° - 60°	1469.5	99.9
0° - 90°	1470.9	100.0
90° - 180°	0.0	0.0
0° - 180°	1470.9	*100.0

*Efficiency

		50% beam - 54.4°		10% beam - 77.9°	
Mounting Height	Inital FC Center Beam	Diameter	FC	Diameter	FC
8.0	47.3	5.7	23.7	8.9	4.7
10.0	25.4	7.7	12.7	12.1	2.5
12.0	15.9	9.8	7.9	15.3	1.6
14.0	10.8	11.8	5.4	18.6	1.1
16.0	7.9	13.9	3.9	21.8	0.8

EV06 35/45 AR MWD LS INPUT WATTS: 47.3, DELIVERED LUMENS: 4532.7LM, LPW= 95.8, 1.03 S/MH, TEST NO. LTL27783P1649




	Ave	Lumens
0	4411	
5	4346	413
15	4443	1247
25	3578	1610
35	1665	1024
45	242	222
55	8	12
65	2	3
75	1	2
85	0	0
90	0	

Zone	Lumens	% Lamp
0° - 30°	3270.7	72.2
0° - 40°	4294.2	94.7
0° - 60°	4528.3	99.9
0° - 90°	4532.7	100.0
90° - 180°	0.0	0.0
0° - 180°	4532.7	*100.0

*Efficiency

		50% beam - 54.4°		10% beam - 77.9°	
Mounting Height	Inital FC Center Beam	Diameter	FC	Diameter	FC
8.0	145.8	5.7	72.9	8.9	14.6
10.0	78.4	7.7	39.2	12.1	7.8
12.0	48.9	9.8	24.4	15.3	4.9
14.0	33.4	11.8	16.7	18.6	3.3
16.0	24.2	13.9	12.1	21.8	2.4

EV06 35/175 AR MWD LS INPUT WATTS: 175.3, DELIVERED LUMENS: 17801LM, LPW=101.5, 1.06 S/MH, TEST NO. ISF 34035P268



	Ave	Lumens
0	16146	
5	15998	1521
15	16006	4479
25	13362	6001
35	7018	4289
45	1470	1299
55	100	156
65	37	38
75	13	14
85	2	2
90	0	

Zone	Lumens	% Lamp
0° - 30°	12002.3	67.4
0° - 40°	16291.0	91.5
0° - 60°	17746.3	99.7
0° - 90°	17801.0	100.0
90° - 120°	0.0	0.0
90° - 130°	0.0	0.0
90° - 150°	0.0	0.0
90° - 180°	0.0	0.0
0° - 180°	17801.0	*100.0

*Efficiency

		50% beam - 55.7°		10% beam - 79.8°	
Mounting Height	Inital FC Center Beam	Diameter	FC	Diameter	FC
8.0	533.7	5.8	266.9	9.2	53.4
10.0	287.0	7.9	143.5	12.5	28.7
12.0	178.9	10.0	89.4	15.9	17.9
14.0	122.1	12.1	61.0	19.2	12.2
16.0	88.6	14.3	44.3	22.6	8.9

Lumen Output Multiplier		
CRI	CCT	Multplier
80	2700K	0.96
	300K	1.00
	3500K	1.00
	4000K	1.01
	5000K	1.07
90	2700K	0.80
	300K	0.83
	3500K	0.85
	4000K	0.87
	5000K	0.91

Reflector Finish Multiplier	
Reflector Finish	Multiplier
LS - Specular	1
LSS - Semi Specular	0.956
WR - White	0.87
LD - Matte Diffuse	0.85
BR - Black	0.73

Distributions		
Nomenclature	Beam Angle	Field Angle
VND	30	64
ND	44	69
MD	54	82
MWD	67	89
WD	71	92

© 2014-2025 Acuity Brands Lighting Inc. All Rights Reserved. Rev. 09/03/25 Specifications subject to change without notice.

NLIGHT AIR

nLight® AIR is the ideal solution for retrofit or new construction spaces where adding communication wiring is cost prohibitive. The integrated nLight AIR rPP20 Power Pack is part of each EVO Luminaire ordered with the NLTAIR option. These individually addressable controls offer the ultimate in flexibility during initial setup and for space repurposing.

nLight® AIR Control Accessories

Order as separate catalog number. Visit nLight AIR.

Wall Switches	Model Number
On/Off single pole	rPODB (color) G2
On/Off two pole	rPODB 2P (color) G2
On/Off & raise/lower single pole	rPODB DX (color) G2
On/Off & raise/lower two pole	rPODB 2P DX (color) G2

nLight® AIR Control Accessories *(cont.)*

Occupancy Sensors (PIR/dual tech)	Model Number
Small motion 360°, ceiling	rCMS 9 / rCMS PDT 9
Large motion 360°, ceiling	rCMS 10 / rCMS PDT 10


UL924 Sequence of Operation

The below information applies to all nLight AIR devices with an EM option.


- EM devices will remain at their high-end trim and ignore wireless lighting control commands, unless a normal-power-sensed (NPS) broadcast is received at least every 8 seconds.
- Using the CL**AIR**ITY+ mobile app, EM devices must be associated with a group that includes a normal power sensing device to receive NPS broadcasts.
- Only non-emergency rPP20, rLSXR, rSBOR, rSDGR, and nLight AIR luminaires with version 3.4 or later firmware can provide normal power sensing for EM devices. See specification sheets for control devices and luminaires for more information on options that support normal power sensing.

Possibilites for nLight® AIR

Fixtures ordered *without* the NLTAIR option

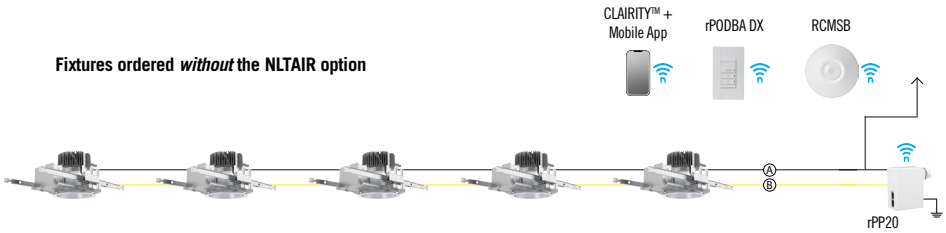

Fixtures ordered *with* the NLTAIR option

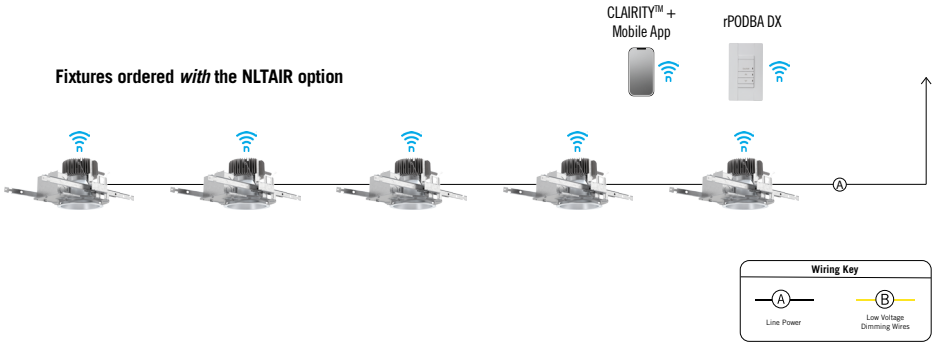

NLIGHT

nLight® The nLight® solution is a digital networked lighting control system that provides both energy savings and increased user configurability by cost effectively integrating time-based, daylight-based, sensor-based and manual lighting control schemes.

nLight® Wired Control Accessories

Order as separate catalog number. Visit nLight.


Wall Switches	Model Number
On/Off single pole	nPODM (color)
On/Off two pole	nPODM 2P (color)
On/Off & raise/lower single pole	nPOD DX (color)
On/Off & raise/lower two pole	nPODM 2P DX (color)
Graphic touchscreen	nPOD GFX (color)
Photocell Controls	
Dimming	nCM ADCX

nLight® Wired Control Accessories *(cont.)*


Occupancy Sensors (PIR/dual tech)	Model Number
Small motion 360°, ceiling	nCM 9 / nCM PDT 9
Large motion 360°, ceiling	nCM 10 / nCM PDT 10
Wide View	nWV 16 / nWV PDT 16
Wall switch with raise/lower	nWSX LV DX / nWSX PDT LV DX
Cat-5 Cables (plenum rated)	
10', CAT5	CAT5 10FT J1
15', CAT5	CAT5 15FT J1

Possibilites for nLight® wired

Fixtures ordered *without* the NLT option

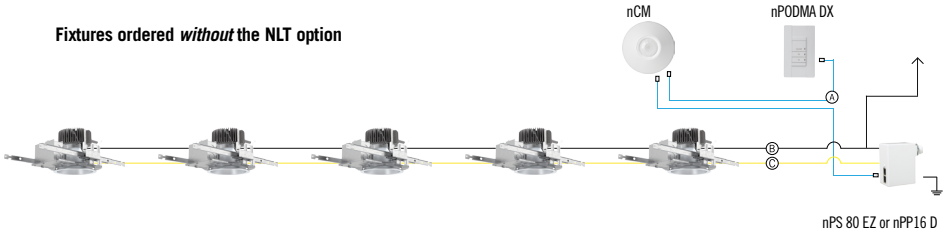

Fixtures ordered *with* the NLT option

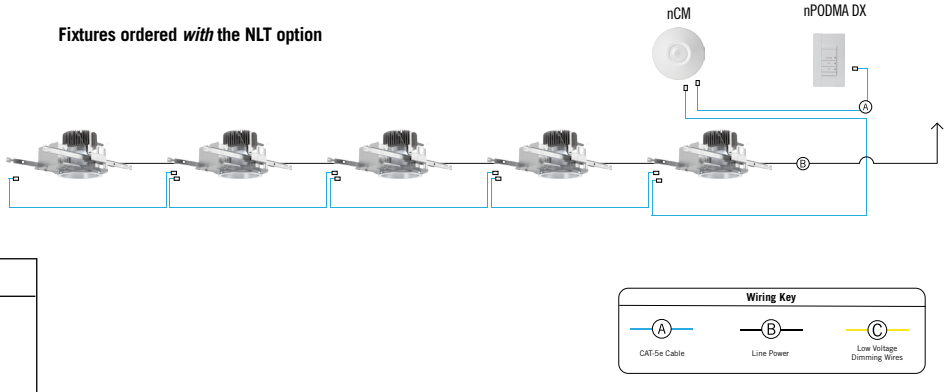

© 2014-2025 Acuity Brands Lighting Inc. All Rights Reserved. Rev. 09/03/25 Specifications subject to change without notice.