



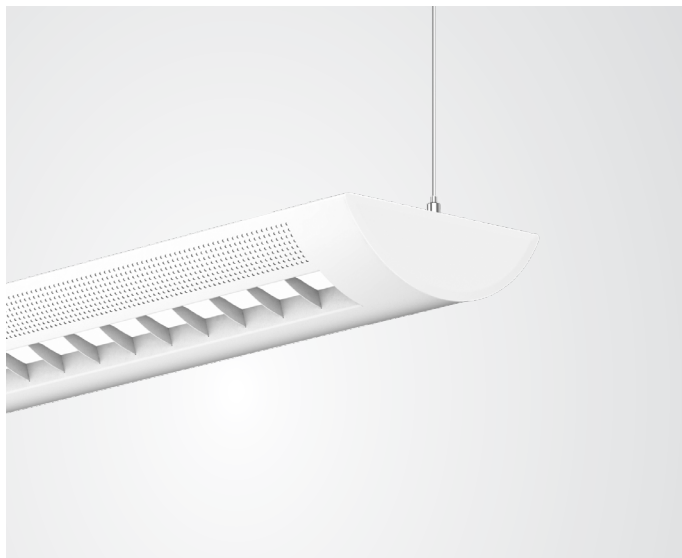


DIMENSIONS


7CRM3L

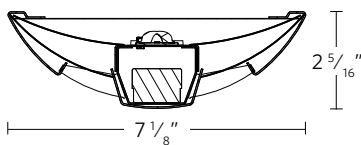

DETAILS



Sculpted end cap




Tenon



Corner

COMPANION LUMINAIRE(S)



CRW4L Cerra Wall
LED Lightvent

CUSTOMIZATION

Ask us about the following possibilities: Higher lumen outputs up to 6100 lumens, section lengths in 1' increments, alternate distributions, alternate voltages, additional mounting options, custom colors, higher CRI and R9 values and other modifications.

HIGHLIGHTS

- Total System Integration features
5-year limited warranty by Acuity Brands covering all components and construction
- 4', 8' and 12' sections
- Up to 112 lm/W
- Two lumen packages
- High performance batwing distribution using injection molded optic
- Flicker-free dimming to dark (0.1%) powered by eldoLED® driver
- Integrated nLight®
- Integrated sensor for daylight dimming and/or occupancy detection (optional)
- Flat or sculptured end caps
- White, black, aluminum or custom color



eldoLED




Declare.

LUMEN PACKAGES

Indirect LED Output	I700LMF	I700LMF	I700LMF	I1300LMF	I1300LMF	I1300LMF
Color Temperature	3000K	3500K	4000K	3000K	3500K	4000K
Delivered Lumens Per Foot	727	772	814	1132	1204	1268
Input Watts Per Foot	7.2	7.2	7.2	12.8	12.8	12.8
Lumens Per Watt	100	107	113	89	94	98

DISTRIBUTION

98% Up | 2% Down

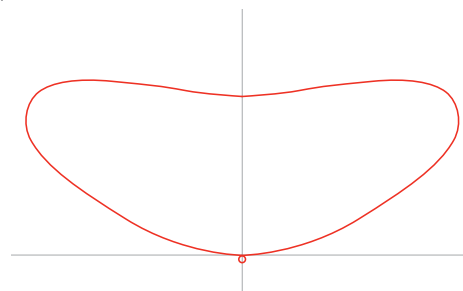

SPECIFICATIONS

Housing

Nominal 7" x 2" crescent housing is formed from one-piece cold-rolled steel.

End Caps

Flat end cap standard. For sculptured die-cast aluminum end caps, choose option SCEP.

Color

Color for housing and end caps is white, black or painted aluminum. Consult factory for custom colors.

Luminaire Length

4', 8', and 12' lengths in a single section for exact suspension spacing of 4', 8', and 12'. For total length, add 1/16" for each flat end cap or 3" for each sculptured end cap. Using internal joiners, 4', 8', and 12' sections can be joined to form longer rows.

Source

Two LED lumen packages and five available color temperature options (2700K, 3000K, 3500K, 4000K and 5000K) — all within 2.5 MacAdam ellipses.

Optics

Optical system consists of injection-molded primary optic, high performance film and highly reflective metal reflector.

Dimming Driver

eldoLED® driver provides "natural dimming" with smooth, continuous and flicker-free dimming to dark (0.1%). Syncing for controls: 2mA max. THD: < 20%. Insignificant inrush current at 120 and 277VAC. FCC Class A and B tested for EMI and RFI. When Control Input of 0-10V is specified driver will be set for linear dimming curve, if NLIGHT is specified driver will be set for logarithmic dimming curve.

For 0-10V driver details go to: PeerlessLighting.com/566L

For DALI driver details go to: PeerlessLighting.com/560L

Controls and System Networking Options

For wired networking via Cat-5e, choose an integrated nLight® module. For daylight dimming and/or dual technology occupancy detection. See Integrated Sensor Layout Page for more details

Electrical

LED light engine — consisting of modular LED boards and 0-10V dimming driver — is rated for 60,000 hours (L80) at 25° C ambient temperature. Specify 120V or 277V. Pre-wired with 16AWG fixture wire.

For special circuiting or wire gauge, consult factory. Plug-in electrical connectors included.

Environment

Suitable for damp location.

Validation

CSA/CUS listed. CSA tested to UL 1598 standards. LM-79 tested. Individual sections meet FCC Part 15 requirements.

Packaging

Recycled cardboard box and inserts. Biodegradable protective luminaire bag. Recycled kraft paper tape.

Warranty

5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25°C.

A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning when used with Acuity Brands controls products.

All configurations of this luminaire are calibrated and tested to meet the Acuity Brand's specification for chromatic consistency - including color rendering, color fidelity and color temperature tolerance around standard CIE chromaticity coordinates.

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details


MODEL NUMBER Example: 7CRM3L LLP 16FT MSL8 80 CRI 35K I700LMF DARK ZT 120 SCT F1/24A C110

Luminaire	Linear Length Plan	Total Run Length	Maximum Section Length	LED Color Rendering	LED Color Temperature	Indirect LED Output	Minimum Dimming Level
7CRM3L	LLP Linear longest possible LCB Linear center balanced LSL Longest same length	_FT Indicate luminaire row length in 4' increments. Ex: 12FT	MSL4 4' section(s) MSL8 8' section(s) MSL12 12' section(s)	80CRI 80+ CRI	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	I700LMF 700 nominal indirect lumens per foot I1300LMF 1300 nominal indirect lumens per foot	DARK Constant current, dimming to < 1%


Control Input	Voltage	Wiring Option	Emergency Options	Primary Sensor	Secondary Sensor
ZT¹ 0-10V NLIGHT² nLight enabled DALI^{2,3} DALI enabled 1. 0-10V will use linear dimming curve 2. Will use Logarithmic dimming curve 3. Not available with sensors	120 120V 277 277V MVOLT 120V-277V	SCT Single circuit	(Blank) None 1EC (1) Emergency circuit module 2EC (2) Emergency circuit module _EC ____ Emergency circuit modules *Emergency type is installed in last 4' of luminaire sections. Separate feed required. **4FT MSL4 Individual fixture with EC Consult factory	(blank) No factory-installed, integrated sensor PDT_ Dual technology occupancy sensor. PIR & microphonics sensor ADC_ Daylight Dimming Sensor APD_ Dual technology PDT and ADC sensor *Available with ZT or nLight only	(blank) No factory-installed, integrated sensor SPDT_ Dual technology occupancy sensor. PIR & microphonics sensor SADC_ Daylight Dimming Sensor SAPD_ Dual technology PDT and ADC sensor *Available with ZT or nLight only

Mounting Type/	Overall Suspension	Color	Options
F1^{1,3,4} T-bar ceiling (universal mounting bracket) F1A^{1,3,4} T-bar ceiling (UMB with integrated J-box) F2^{2,3,4} Hard ceiling (horizontal J-box) 1. F1 & F1A Mount uses standard 3 1/2" canopy on feed and 2" canopy on support 2. F2 Mount uses standard 5" canopy on feed and 2" canopy on support 3. All feed cords, cord managers and canopies are standard white. They are not painted to match fixture color. 4. BLK is an available option for Black cord & canopy. Choose BLK in Options column.	12F 12" fixed 18F 18" fixed 24F 24" fixed 24A 24" adjustable 36A 36" adjustable 48A 48" adjustable 72A 72" adjustable 96A 96" adjustable 144A 144" adjustable 192A 192" adjustable 240A 240" adjustable *Measured from ceiling to bottom of luminaire.	C110 Painted aluminum (low gloss) C210 White white (fine textured) C202 Black (fine textured) C099¹ Custom color RALTB² Ral Paint finishes 1. C099 for pricing only. Custom color chip and requested finish needs to be sent in to your Customer Care Rep and matched up with our paint department and customer approved before order is entered. Standard finish choice is Textured (C099T) 2. RALTB for pricing only. replace with applicable RAL call out when ready to order. See the RAL BROCHURE for available options	BLK¹ Black cord, cord manager and canopy CSA² Manufactured to Canadian Standards CP Chicago Plenum (available with F1A only) ELH³ Emergency through wiring w/separate neutrals-single EM feed at opposite end of normal ELS2³ Emergency through wiring w/separate neutrals-single EM feed at same end of normal GLR Fast blow GMF Slow blow MCS⁴ Matching canopy at support for aesthetics MCSJ^{4,5} Matching canopy for J-box mounting at non-power feed support locations OJB^{4,6} Offset J-box at feed SCEP Sculptured end caps SLP⁷ Sloped ceiling 1. Not available with nLight 2. When chosen with EC entire section must be EC. EX: MSL8 section would need to be 2EC for entire section 3. Not available with CSA 4. MCS or MCSJ cannot be chosen with OJB 5. MCSJ available with F2 Mount only 6. OJB available with F2 Mount only 7. When SLP is chosen need to choose F2 Mount and OJB


PHOTOMETRICS




I700LMF 80 CRI 30K
100 lm/W
2908 delivered lumens per 4' section
98% up / 2% down




I700LMF 80 CRI 35K
107 lm/W
3089 delivered lumens per 4' section
98% up / 2% down




I700LMF 80 CRI 40K
112 lm/W
3258 delivered lumens per 4' section
98% up / 2% down



I1300LMF 80 CRI 30K
89 lm/W
4530 delivered lumens per 4' section
98% up / 2% down



I1300LMF 80 CRI 35K
94 lm/W
4815 delivered lumens per 4' section
98% up / 2% down




I1300LMF 80 CRI 40K
98 lm/W
5073 delivered lumens per 4' section
98% up / 2% down


WEIGHTS & SUPPORT SPACING

Suspension spacing equals section length. Default location shown.

STANDARD SECTIONS

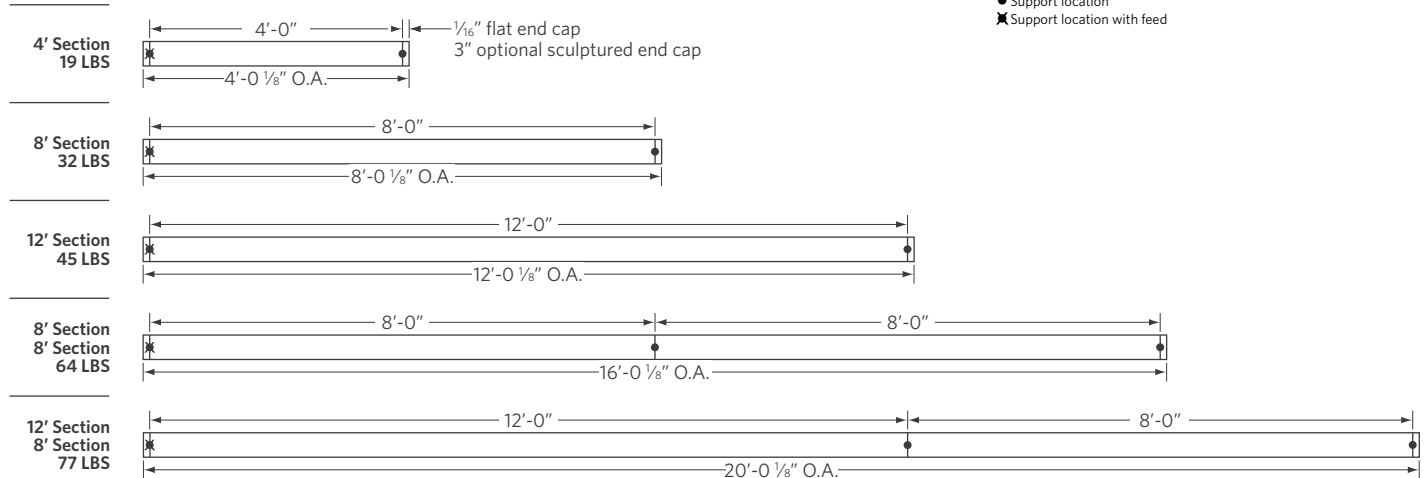

PLAN VIEW

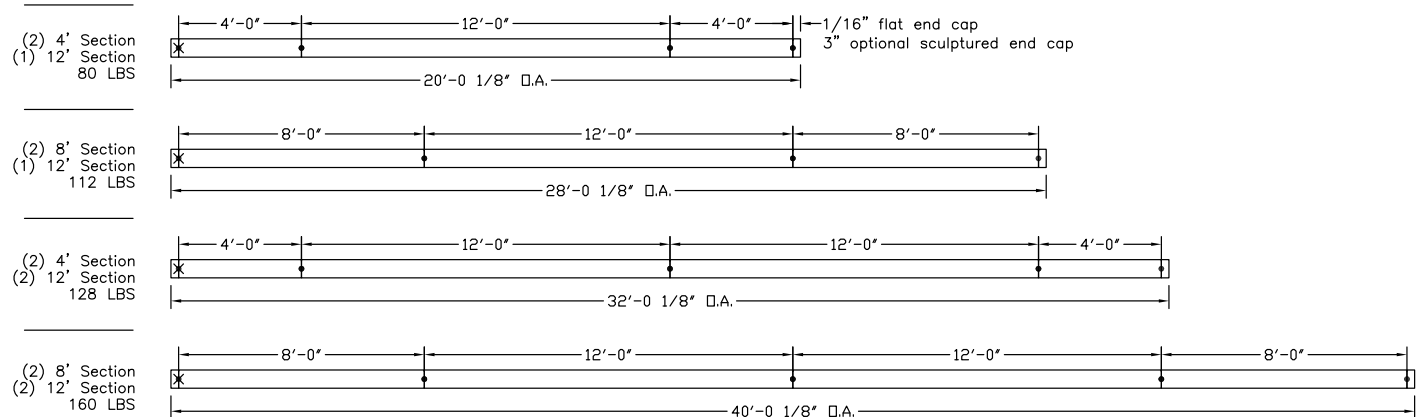

LCB — Linear Center Balanced layouts

LINEAR PLAN:

PEERLESS offers the ability to provide a continuous run plan to suit your requirements by optionally offering three different methods of configuration.

LCB- Linear Center Balanced:

This configuration incorporates the longest center segment(s) along with any additional lengths required to fill the run length, added to the run ends. Example: 20 FT run would have 2, 4 FT segments (one at each end) and 1, 8 FT segment in the center.

LCB	4 FT	8 FT	4 FT
------------	------	------	------

LLP- Linear Longest Possible

In this configuration, the longest length available is optimized, resulting in the fewest segments and mounting locations. Caution, should be used where balanced appearance is a concern. Example: 20 FT run would have 2, 8 FT segment and 1, 4 FT segment at the end of the run.

LLP	8 FT	8 FT	4 FT
------------	------	------	------

LSL- Linear Same Length:

In this configuration, each segment is the same length and is standardized based on the longest length available and is the only option provided. Because it is dependent on one segment length there are mathematical limitations on what overall row lengths can be achieved. Example: 20 FT row would be achieved with 5, 4 FT long segments equaling 20 FT (nominal).

LSL	4 FT	4 FT	4 FT	4 FT	4 FT
------------	------	------	------	------	------

MOST COMMON MOUNTING TYPES AND OPTIONS Options available for this specific luminaire are checked in the boxes below.

Mounting Type











- F1/** For use with most T-Bar and screw slot grid ceilings. Designed for on-grid and off-grid applications.
- F2/** For use with recessed or surface-mount horizontal J-box applications.
- F3/** Stem mounting for use with recessed or surface-mount horizontal J-box applications. *Check with local jurisdiction regarding rigid stem code requirements.*
- F1A/** For use with most T-Bar and screw slot grid ceilings. Designed for on-grid and off-grid applications. *Comes complete with vertical J-box with built-in wire way. See also CP.*

Mounting Options

- MCS** Matching canopy at support for aesthetics.
- MCSJ** Matching canopy for J-box mounting at non-power feed support locations.
- OJB** Offset J-box at feed.
- SLP OJB** Sloped ceiling couplers and offset J-box option at feed.

For more detailed mounting drawings and information, see peerlesslighting.acuitybrands.com/resources

☒ Indicates mounting options available with this luminaire.

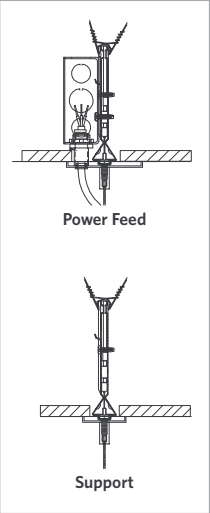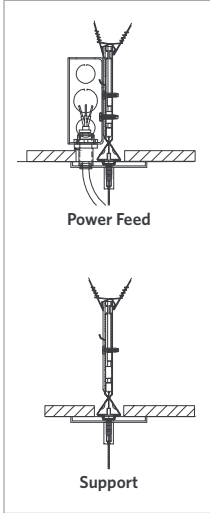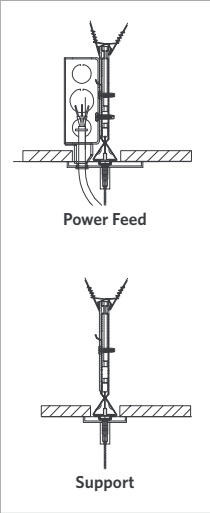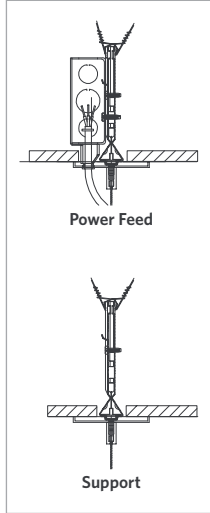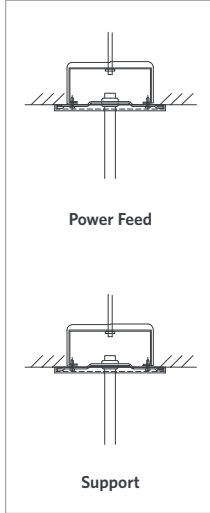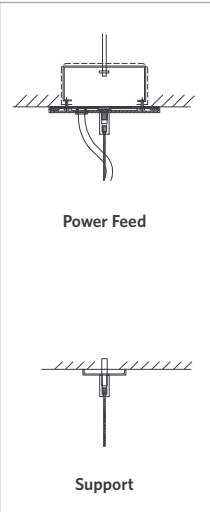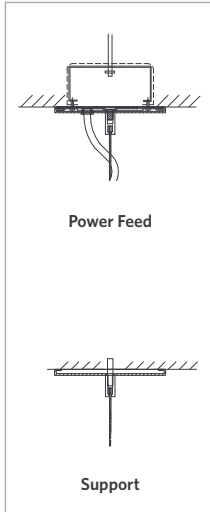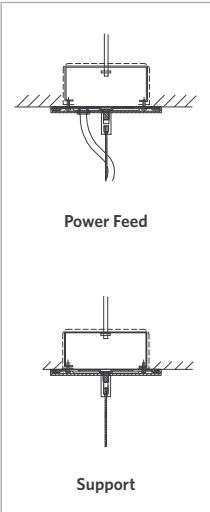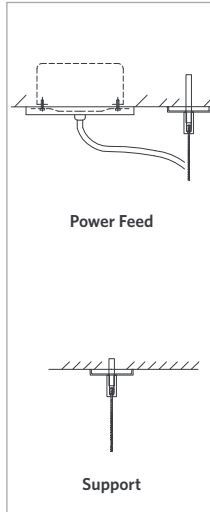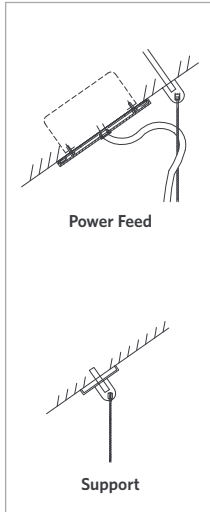☒ F1/	☒ F1/MCS	☒ F1A/	☒ F1A/MCS	☐ F3/
				
☒ F2/	☒ F2/MCS	☒ F2/MCSJ	☒ F2/OJB	☒ F2/SLP OJB
				

For more information about sensor and networking options, download the controls guide at PeerlessLighting.com/ControlsGuide

INTEGRATED SENSOR OPTIONS

Control Input	Integrated Sensor	Daylight Dimming	Occupancy Detection	nLight Wired Networking	nLight Wireless Networking	Link to Spec Sheet
NLIGHT	ADC	X		X		nES-ADCX
NLIGHT	PDT		X	X		nES-7
NLIGHT	APD	X	X	X		nES-7
ZT	ADC	X				nES-ADCX
ZT	PDT		X			nES-7
ZT	APD	X	X			nES-7

Daylight harvesting deactivated by default and field programmed per sequence of operations for PDT sensor options.

Luminaires specified with nLight system networking ship with one RJ-45 connector integrated into the luminaire, 10' of Cat-5e cable and a splitter to control the entire luminaire row (depending on wattage/voltage limitations). For multiple zones, please contact TechSupport-Lighting@AcuityBrands.com.




OCCUPANCY DETECTION COVERAGE

At the 7.5 ft (2.9 m) hanging height of a typical pendant mount fixture the sensor provides 10 ft (3.05 m) radial detection of small motion. At a 9 ft (2.74 m) hanging height the radius is 12 ft (3.66 m) for small motion.

Adequate for walking motion detection from mounting heights between 7.5 ft (2.29 m) and 20 ft (6.10 m).

Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor.

Initial detection of walking motion into long coverage segment will occur at distances of 2x the mounting height up to 15 ft (4.57 m) and 1.75x up to 20 ft (6.10 m). Lens assembly rotates 15° to enable adjustment in order to line up long segments.

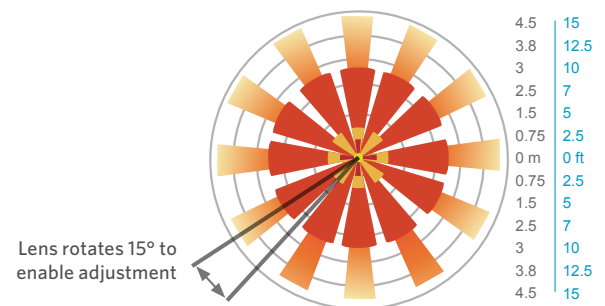

COMPATIBLE nLIGHT COMPONENTS WITH INTEGRATED CONTROLS


nLight® Wired Control Accessories <i>Order as separate catalog number</i>	
Wall Switches	Model Number
On/Off single pole	nPODMA (color)
On/Off two pole	nPODMA 2P (color)
On/Off single pole, dimming	nPODMA DX (color)
On/Off two pole, dimming	nPODMA 2P DX (color)
On/Off, two level	nPODMA 2L (color)
Graphic touchscreen	nPOD TOUCH (color)

eldoLED COMPATIBILITY Additional control options with eldoLED 0-10V driver(s).

PeerlessLighting.com/eldoLED-compatibility


INTEGRATED SENSOR LAYOUT

CORRECT:

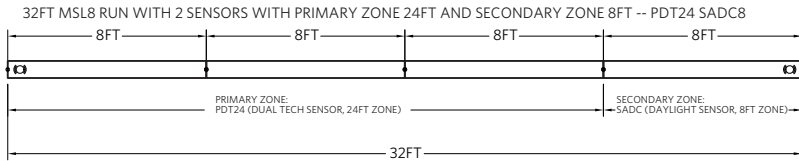

Notes:

- Only one sensor per zone
- At the most, the entire run can only have 2 sensors (thus 2 sensors zones at the most)
- Sensor zone can not split fixture sections
- No overlapping zones
- One nLight or NLTAIR2 device per zone or per sensor, for multiple zones without sensors contact factory

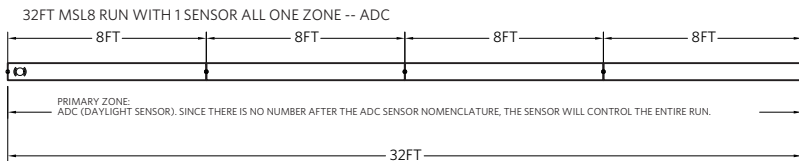

INCORRECT:

