

# ATL1

An elegantly slim fixture, finished with subtle detailing to provide a high level of indirect lighting performance in a simple but robust package.

5Y  
Warranty

  
Certified

  
Controls

  
Compliant

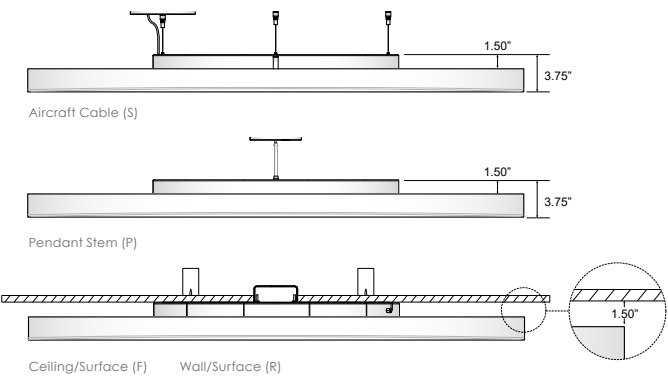
  
Buy American

Performance

| OUTPUT             | DIAMETER | INDIRECT - SUSPENDED |             |          |
|--------------------|----------|----------------------|-------------|----------|
|                    |          | DELIVERED LM         | INPUT WATTS | EFFICACY |
| LVH<br>(very high) | 20"      | 3182 lm              | 25 W        | 127 lm/W |
|                    | 32"      | 4654 lm              | 36 W        | 129 lm/W |
|                    | 48"      | 6212 lm              | 50 W        | 124 lm/W |

Based on static white 4000k. For the complete photometric data of this fixture refer to pages 2.

Dimensions



| ATL1   |                               |                                                                                               |                                                             |                    |                      |                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------|-------------------------------|-----------------------------------------------------------------------------------------------|-------------------------------------------------------------|--------------------|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SERIES | DIAMETER                      | OUTPUT                                                                                        | CCT                                                         | CRI                | VOLTAGE              | MOUNTING                                                                                                                                                                                                                                                                                                                                                                                                       |
| ATL1   | 24 Ø24"<br>36 Ø36"<br>48 Ø48" | LS Standard Output<br>LH High Output<br>LVH Very high Output<br>C_ Custom Output <sup>1</sup> | 30 Indirect 3000k<br>35 Indirect 3500k<br>40 Indirect 4000k | 80+ CRI<br>90+ CRI | U 120-277V<br>3 347V | S Aircraft Cable <sup>1</sup><br>R Wall Surface Mount<br>F Ceiling Surface Mount<br>P_ Rigid Stem <sup>2</sup><br>PV_ Swivel Stem <sup>2</sup>                                                                                                                                                                                                                                                                 |
|        |                               |                                                                                               |                                                             |                    |                      | Black power cord provided for Black and Titanium finish and White power cord provided for all other fixture finishes, unless otherwise specified.<br><sup>1</sup> Standard 48" field adjustable cable, specify length to nearest inch if over 48".<br><sup>2</sup> Indicate stem length to nearest inch, 4.00" minimum - 98" maximum. Coupler and multiple stems will be provided to requests longer than 98". |

<sup>1</sup>Contact Design Assist for custom tuning.

| FINISH                                                                                                                                                                                                                          | ACOUSTICS FINISH                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | DIMMING                               |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|
| T Titanium<br>W White<br>B Black<br>O Other <sup>1</sup>                                                                                                                                                                        | <p>Standard Colors</p> <div><div>ABF</div><div>AWF</div><div>BBF</div><div>BOF</div><div>BTF</div><div>BYF</div><div>CHF</div><div>NBF</div><div>OBF</div><div>PGF</div><div>REF</div><div>SGF</div><div>TGF</div><div>ZFF</div></div> <p>Signature Colors</p> <div><div>BGF</div><div>BKF</div><div>DBF</div><div>DTF</div><div>DYF</div><div>GGF</div><div>LBF</div><div>LGF</div><div>MGF</div><div>OAF</div><div>PBF</div><div>PNF</div><div>PPF</div><div>SBF</div><div>TOF</div><div>TPF</div></div> | D Standard 0-10V dimming <sup>1</sup> |
| <p><sup>1</sup>Specify RAL# or other custom color.</p> <p><sup>1</sup>See Acoustic color chart for reference. Signature colors require longer lead time.</p> <p><sup>1</sup>1% Dimming standard unless otherwise specified.</p> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                       |



Need help?  
Don't see what you need?  
We know that having so many options can be overwhelming. Please reach out to our factory for any specific request or questions you have.

Our Design Assist team  
([designassist@alights.com](mailto:designassist@alights.com))  
is here to make the process move smoothly.

Light distribution

DISTRIBUTION

Indirect Symmetric

Photometric data

OUTPUT (DC)


LVH: Very high output  
LH: High output  
LS: Standard output  
C: Custom tuned output - Contact Design Assist

INDIRECT SYMMETRIC SUSPENDED

ATL1 - 20 - LVH - 4000K

Lumens: 3182 lm  
Input watts: 25 W  
Efficacy: 127 lm/W


DLH: —



ATL1 - 32 - LVH - 4000K

Lumens: 9191 lm  
Input watts: 100 W  
Efficacy: 92 lm/W


DLH: —



ATL1 - 48 - LVH - 4000K

Lumens: 6212 lm  
Input watts: 50 W  
Efficacy: 124 lm/W

DLH: —





Light loss factors (LLF)

| OUTPUT             | CCT   | LLF RATIO |        | INDIRECT EFFICACY |          |          |          |          |          |
|--------------------|-------|-----------|--------|-------------------|----------|----------|----------|----------|----------|
|                    |       |           |        | 20"               |          | 32"      |          | 48"      |          |
|                    |       | CRI 80    | CRI 90 | CRI 80            | CRI 90   | CRI 80   | CRI 90   | CRI 80   | CRI 90   |
| LVH<br>(very high) | 4000K | 1.01      | 0.86   | 127 lm/W          | 108 lm/W | 129 lm/W | 110 lm/W | 124 lm/W | 106 lm/W |
|                    | 3500K | 1         | 0.85   | 126 lm/W          | 107 lm/W | 128 lm/W | 109 lm/W | 123 lm/W | 105 lm/W |
|                    | 3000K | 0.98      | 0.83   | 123 lm/W          | 105 lm/W | 125 lm/W | 106 lm/W | 121 lm/W | 102 lm/W |
|                    | 2700K | 0.94      | 0.81   | 118 lm/W          | 102 lm/W | 120 lm/W | 104 lm/W | 116 lm/W | 100 lm/W |
| LH<br>(high)       | 4000K | 1.01      | 0.86   | 129 lm/W          | 110 lm/W | 135 lm/W | 115 lm/W | 128 lm/W | 109 lm/W |
|                    | 3500K | 1         | 0.85   | 128 lm/W          | 109 lm/W | 134 lm/W | 114 lm/W | 127 lm/W | 108 lm/W |
|                    | 3000K | 0.98      | 0.83   | 125 lm/W          | 106 lm/W | 131 lm/W | 111 lm/W | 124 lm/W | 105 lm/W |
|                    | 2700K | 0.94      | 0.81   | 120 lm/W          | 104 lm/W | 126 lm/W | 109 lm/W | 119 lm/W | 103 lm/W |
| LS<br>(standard)   | 4000K | 1.01      | 0.86   | 129 lm/W          | 110 lm/W | 135 lm/W | 115 lm/W | 126 lm/W | 108 lm/W |
|                    | 3500K | 1         | 0.85   | 128 lm/W          | 109 lm/W | 134 lm/W | 114 lm/W | 125 lm/W | 106 lm/W |
|                    | 3000K | 0.98      | 0.83   | 125 lm/W          | 106 lm/W | 131 lm/W | 111 lm/W | 123 lm/W | 104 lm/W |
|                    | 2700K | 0.94      | 0.81   | 120 lm/W          | 104 lm/W | 126 lm/W | 109 lm/W | 118 lm/W | 101 lm/W |



| OUTPUT             | CCT   | LLF RATIO |        | INDIRECT LUMEN OUTPUT |            |            |            |            |            |
|--------------------|-------|-----------|--------|-----------------------|------------|------------|------------|------------|------------|
|                    |       |           |        | 20"                   |            | 32"        |            | 48"        |            |
|                    |       | CRI 80    | CRI 90 | CRI 80                | CRI 90     | CRI 80     | CRI 90     | CRI 80     | CRI 90     |
| LVH<br>(very high) | 4000K | 1.01      | 0.86   | 3182 lm/ft            | 2709 lm/ft | 4654 lm/ft | 3963 lm/ft | 6212 lm/ft | 5289 lm/ft |
|                    | 3500K | 1         | 0.85   | 3150 lm/ft            | 2678 lm/ft | 4608 lm/ft | 3917 lm/ft | 6150 lm/ft | 5228 lm/ft |
|                    | 3000K | 0.98      | 0.83   | 3087 lm/ft            | 2615 lm/ft | 4516 lm/ft | 3825 lm/ft | 6027 lm/ft | 5105 lm/ft |
|                    | 2700K | 0.94      | 0.81   | 2961 lm/ft            | 2552 lm/ft | 4332 lm/ft | 3732 lm/ft | 5781 lm/ft | 4982 lm/ft |
| LH<br>(high)       | 4000K | 1.01      | 0.86   | 2586 lm/ft            | 2202 lm/ft | 3790 lm/ft | 3227 lm/ft | 5259 lm/ft | 4478 lm/ft |
|                    | 3500K | 1         | 0.85   | 2560 lm/ft            | 2176 lm/ft | 3752 lm/ft | 3189 lm/ft | 5207 lm/ft | 4426 lm/ft |
|                    | 3000K | 0.98      | 0.83   | 2509 lm/ft            | 2125 lm/ft | 3677 lm/ft | 3114 lm/ft | 5103 lm/ft | 4322 lm/ft |
|                    | 2700K | 0.94      | 0.81   | 2406 lm/ft            | 2074 lm/ft | 3527 lm/ft | 3039 lm/ft | 4895 lm/ft | 4218 lm/ft |
| LS<br>(standard)   | 4000K | 1.01      | 0.86   | 1293 lm/ft            | 1101 lm/ft | 1895 lm/ft | 1613 lm/ft | 2525 lm/ft | 2150 lm/ft |
|                    | 3500K | 1         | 0.85   | 1280 lm/ft            | 1088 lm/ft | 1876 lm/ft | 1595 lm/ft | 2500 lm/ft | 2125 lm/ft |
|                    | 3000K | 0.98      | 0.83   | 1254 lm/ft            | 1062 lm/ft | 1838 lm/ft | 1557 lm/ft | 2450 lm/ft | 2075 lm/ft |
|                    | 2700K | 0.94      | 0.81   | 1203 lm/ft            | 1037 lm/ft | 1763 lm/ft | 1520 lm/ft | 2350 lm/ft | 2025 lm/ft |

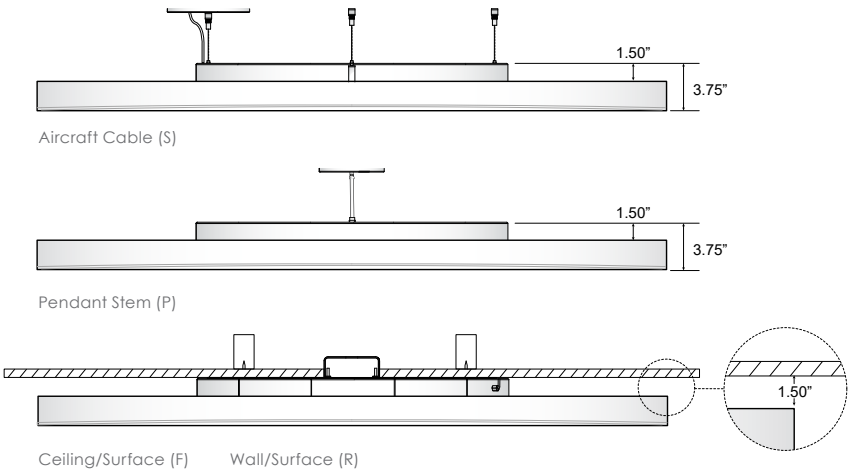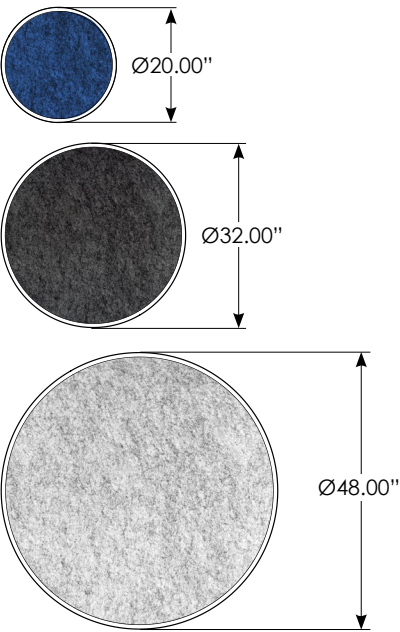Mounting & Dimensions









Acoustic colors chart

Standard colors

|                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |
| ABF<br>Azure Blue                                                                 | AWF<br>Arctic White                                                               | BBF<br>Basic Black                                                                | BOF<br>Blood Orange                                                               | BTF<br>Battleship<br>Gray                                                          | BYF<br>Banana<br>Yellow                                                             | CHF<br>Charcoal                                                                     |
|  |  |  |  |  |  |  |
| NBF<br>Navy Blue                                                                  | OBF<br>Ocean Blue                                                                 | PGF<br>Pear Green                                                                 | REF<br>Red                                                                        | SGF<br>Silver Gray                                                                 | TGF<br>Titanium<br>Gray                                                             | ZFF<br>Zinfandel                                                                    |

Signature colors

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|   |   |   |   |   |   |   |
| BGF<br>Bubble Gum                                                                   | BKF<br>Bark Brown                                                                   | DBF<br>Denim Blue                                                                   | DTF<br>Deep Teal<br>Green                                                           | DYF<br>Daisy Yellow                                                                  | GGF<br>Grass Green                                                                    | LBF<br>Light Beige                                                                    |
|  |  |  |  |  |  |  |
| LGF<br>Lime Green                                                                   | MGF<br>Moss Green                                                                   | OAF<br>Oak Brown                                                                    | PBF<br>Peanut Brown                                                                 | PNF<br>Pinot Noir                                                                    | PPF<br>Plum Purple                                                                    | SBF<br>Sky Blue                                                                       |
|  |  |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |
| TOF<br>Tangerine<br>Orange                                                          | TPF<br>Tulip Purple                                                                 |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |

## DIMENSIONS

20", 32", and 48" diameter surface and suspension fixtures maintain a 2.25" profile height and 3.75" overall height including back wireway compartment making the fixture ADA compliant.

## OPTICS

**Suspended:** A thin clear, acrylic lens optimized for indirect LED performance delivers 95% transmittance.

**Surface:** A thin diffuse lens optimized for indirect LED performance delivers 90% transmittance for an ambient glow effect.

## LED LIGHT SOURCE

Custom manufactured linear board array uses high performance Nichia® LED in combination with a performance driven heat sink technology. Tested in accordance with LM-79 and LM-80; L70>60,000hr; operated at reduced output for high efficacy and lumen maintenance. 3000K, 3500K, and 4000K with 80+ CRI standard; other color temperatures and 90+ CRI available upon request, contact factory. LED color variation maintained at a 3-step MacAdam ellipse (SDCM 3x). Refer to photometry for delivered lumens.

## LED DIMMING DRIVER

Factory tuned constant current electronic 0-10V control dimming driver is standard. Specification grade dimming down to 5%. Driver life of 50,000 hrs with ambient operating temperature range of -30°C to 50°C, maximum case temperature of 75°C. Electrical specifications at maximum driver load: PF >0.9, THD <20%, >85% Efficiency.

## CONTROLS

nLight enabled, remote mounted controls provided by others. Please contact an Acuity controls representative for more information.

## MOUNTING

Aircraft cable set includes three 48" standard length 1/16 stainless steel adjustable aircraft cables with secure micro grippers to field set suspension length, comes factory installed in fixture. 4-1/2" round canopy. IDS caddy clip and cord strain also included. Please refer to installation sheets for mounting weight requirements. Power cord options available for aircraft cable. Black power cord provided for satin black and titanium finish, white power cord provided for all other fixture finishes unless otherwise specified.

Rigid pendant stem set includes 1/2" IPS hollow threaded rod for suspension and power feed, standard specification length, 6" minimum - 98" maximum provided with a 5" round canopy diameter. Coupler and multiple stems will be provided to requests longer than 98".

Swivel stem set includes 1/2" IPS hollow white threaded rod for suspension and power feed, standard specification length, 6" minimum, provided with a 5" round canopy diameter.

Specify if other suspension length is required. Fixture can be mounted on angles within the recommended scope, please refer to installation instruction guide for recommended angles and mounting points for optimum conditions.

Ceiling surface mount version has a galvanized mounting plate that attaches to the junction box with #8-32 screws (provided by others) and is recommended to be further affixed to the ceiling with additional fasteners through the slots in the mounting plate (see installation instructions). The fixture twists onto this mounting plate through a series of descending receiving flanges, and is secured in place with a spring loaded locking mechanism. This mechanism also facilitates dismounting the fixture.

Wall surface mount version has a galvanized mounting plate that attaches to the junction box with #8-32 screws (provided by others) and is recommended to be further affixed to the wall with additional fasteners through the slots in the mounting plate (see installation instructions). The fixture twists onto this mounting plate through a series of descending receiving flanges, and is secured in place with a spring loaded locking mechanism.

## ACOUSTICS

Fire tested according to ASTM E-84 Class A. The carefully studied hollow core design and the large surface area contribute to lowering the reverberation time in a set environment by absorbing sound frequencies (ideal for human voice range 250Hz to 2000Hz). Material has inherent NRC of 0.75. It is recommended to consult sound professionals for optimal spacing, positioning and quantity of acoustic material for your environment. Due to the dye process, colors may vary from batch to batch. Signature colors require longer lead time. Refer to full terms and conditions on our website.

## FINISH

Electrostatically applied powder coat finish. Standard finish options include titanium, textured white and textured black. Other colors and custom finish options available, specify RAL# or contact factory regarding custom finish requirement. Colors may vary from batch to batch.

## LISTING

Tested in accordance with UL 1598 and certified to CEC/CSA C22.1, NEC, ANSI/NFPA 70, and NOM-001-SEDE. For USA and Canada. Dry & damp locations only.

The ATL1 is assembled in the U.S.A. and complies with the Buy America(n) Act (BAA) government procurement requirements under FAR, DFARS, and DOT.

## WARRANTY

Limited defect-free manufactured equipment warranty provided under normal use and proper storage for a period of one (1) year. LED products (LED boards and drivers) will be covered for a period of five (5) years. Please refer to full terms and conditions on our website. [www.alights.com/downloads/warranty/](http://www.alights.com/downloads/warranty/)